

# TARGET TANK INSTRUCTIONS

The AIRE Environmental Target Tank was originally designed as a dip tank for firefighting helicopters. It's bright red, making it a perfect target for pilots. It can also be used as a quick way to store other liquids. Fill or discharge it through the large opening in the top, or request a custom build so that you can perform those operations through the wall.

## WHAT YOU NEED TO KNOW

### PREPARATION

1. Excavate a level pad that is at least the diameter of the target tank.
2. Cover the pad with the included geotextile ground sheet.
3. Unfold the tank on top of the ground sheet.

### INFLATION

1. Slide the valve adapter into the vinyl tubing.
2. Unscrew the valve cap.
3. Push the stem in the valve down and turn it to the right. (Doing so will allow air to fill the ring, but not to escape.)
4. Twist the valve adapter into the valve.
5. Slide the vinyl tubing over the end of your pump or the included Air Daddy attachment.
6. Pump up the ring. **DO NOT OVERINFLATE** You should be able to indent the ring 1/2" with your thumb at full inflation (2.5 psi).
7. Close the valve cap.

#### Note:


To deflate the ring, push down the stem in the middle of the valve and turn it to the left.

### FILL

1. If your tank is designed to integrate with a fitting, install the fitting and any necessary valves or caps.
2. Fill the tank with water.

#### Note:

Watch the tank as it fills. If it starts to lean or move, drain it, rebuild the installation pad to make sure it's level and fill the tank again.

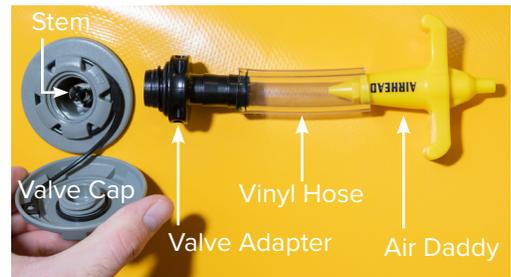

Need a custom size, color or design? Call 1 (800) 247-3846.

